


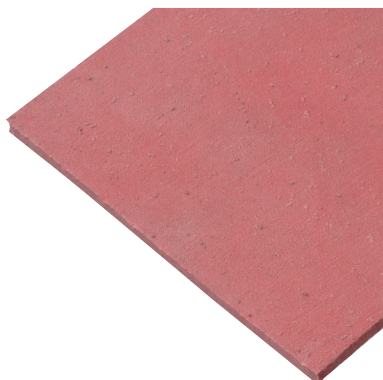

Linatex

Material

Wear resistant rubber

Color

Red

Density (gr/cm³)

0,98

Hardness (°Shore)

37 +-5

Pressure max. (bar)

10

Temperature limit (°C)

Min -40°C, max +70°

Application

Linatex is very suitable for tackling wear- and corrosion related problems. Linatex is mainly applicable for the sand- and gravel industry as well as the mining industry.

Approvals and certificates

-

Table 1: Technical data*

Property	Norm	Value	Unit
Max. surface pressure σ_{v0}		10	MPa
Minimum temperature		-40	°C
Maximum temperature		+70	°C
Hardness	ISO 7619	37	Shore A
Elongation at break	ISO 37	800	%
Tensile strength	ISO 37	26,6	N/mm ²
Density		0,98	g/cm ³

* Depending on temperature en construction.

Table 2: Supply programme*

Thickness (mm)	Inserts	Width (mm)	Length (mm)	Part no.
1,5	-	1230	On request	11547876
2	-	1230	On request	11547877
3	-	1230	On request	11537913
5	-	1230	On request	11547878
6	-	1230	On request	11547879
8	-	1230	On request	11547880
10	-	1230	On request	11547881
12	-	1230	On request	11547882
15	-	1230	On request	11547893
20	-	1230	On request	11547894
25	-	1230	On request	11547895
30	-	1230	On request	11547896

* Deviating thickness available upon request. Gaskets according to drawings can easily and quickly be manufactured.

Disclaimer: The content of this document has been composed with the utmost care. However, it is possible that certain information changes over time, becomes inaccurate or incomplete. ERIKS does not guarantee that the information provided on this document is up to date, accurate and complete; the information provided is not intended to be advice. ERIKS shall never be liable for damage resulting from the use of the information provided.

For more information, quotations or orders:

The Netherlands : +31 88 855 80 44 of gaskets@eriks.nl

Belgium : Dutch +32 3 210 91 10 of flangegaskets@eriks.be

Francophone +32 71 91 50 64 of flangegaskets@eriks.be

page 1/1